


Saab

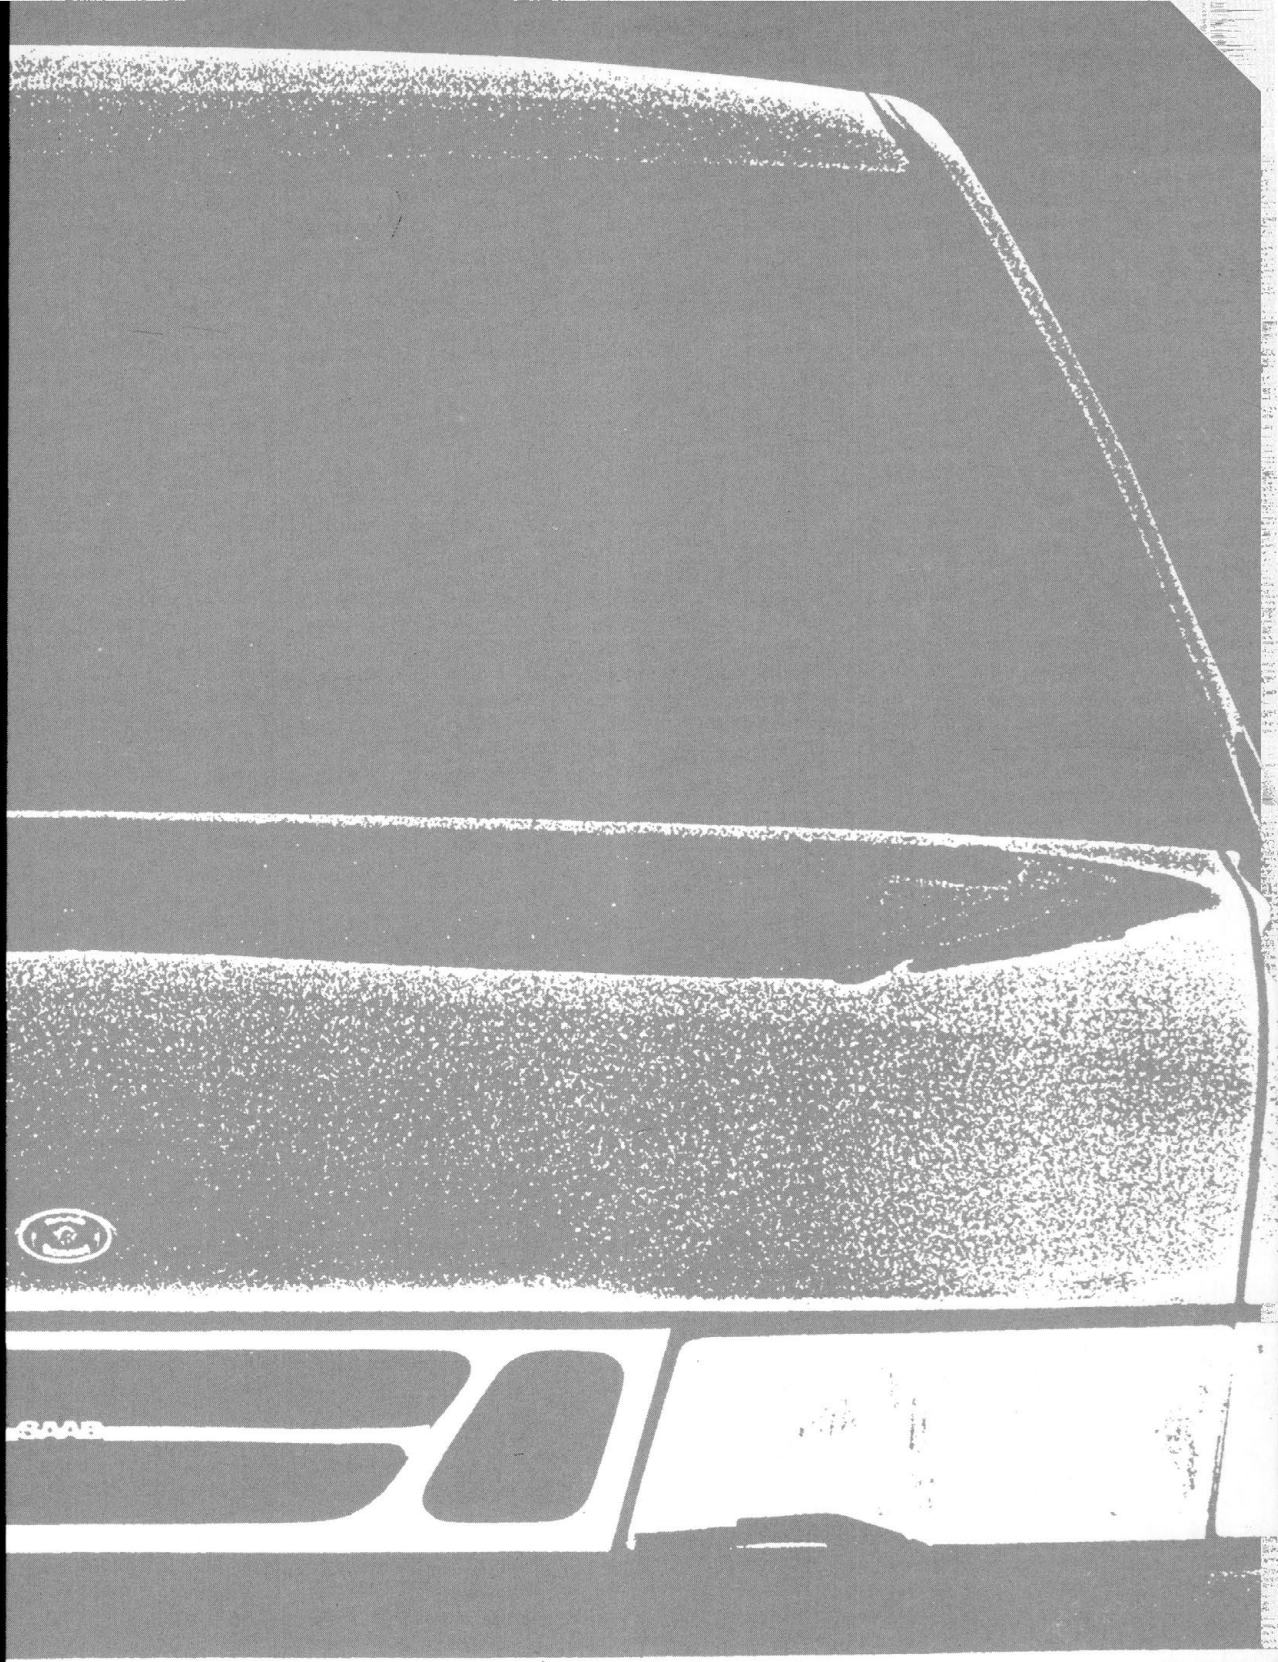

Product Catalogue
1:3 Chemicals

Edition 1998

ENG



SAAB

Saab

PRODUCT CATALOGUE

1:3 Chemicals

Foreword

This catalogue contains the products required for restoring the car after repair. The products are after-sales versions of the products used in manufacture and have been tested and approved by Saab Automobile AB.

This catalogue replaces the previous 1997 edition.

We reserve the right to make changes without prior notice.

Saab automobile AB



Contents

Introduction	3
Adhesive	5
74 96 292 Thread locking adhesive	5
74 96 268 Thread locking adhesive	5
74 96 276 Thread locking adhesive	6
49 04 090 Adhesive	6
30 04 769 Bodywork adhesive	7
30 18 702 Paint primer	7
30 05 600 Adhesive kit, window glass	8
30 05 618 Adhesive kit, plastic-imbedded glass	8
30 30 699 Adhesive kit rear window CV	9
82 93 235 Adhesive	9
30 18 645 Adhesive	10
46 20 084 Ultra fast adhesive	10
30 02 631 Adhesive kit	11
30 18 652 Nozzle	11
30 08 075 Rubber moulding adhesive	12
Lubricants	13
87 81 684 Universal paste	13
30 20 971 Screw-thread paste	13
30 20 476 Ball bearing grease	14
30 06 442 White high-pressure grease paste	14
82 93 243 Low temperature grease	15
30 07 309 Silicone paste	15
30 06 582 Lubricating fluid	16
30 06 954 Anti-seize lubricant PFTE	16
30 08 604 Clean dry lubricating film	17
30 08 612 Chain grease	17
49 04 108 Brake cylinder paste	18
30 07 457 Copper grease	18
30 07 481 Copper grease	19
30 06 665 Vaseline	19
87 92 624 Special grease	20
87 81 676 Special grease	20
87 81 718 Silicone grease	21
30 15 286 Vaseline	21
40 74 787 Compressor oil	22
47 59 106 Compressor oil	22
30 19 312 Anti-friction agent	23
30 18 694 Hydraulic oil	23
30 32 356 Hydraulic oil	24
30 09 800 Power steering fluid	24
30 32 380 Power steering fluid	25
87 81 668 Fluid	25
30 18 637 White oil	26
30 32 497 Krytox Aerosol	26

Sealing compounds	27
74 96 284 Thread locking adhesive	27
87 81 841 Silicone flange sealant	27
93 21 795 Flange sealant	28
30 32 331 Body sealing compound	28
30 07 085 Body sealing compound	29
30 07 093 Body sealing compound	29
30 17 787 Sprayable joint sealant/underseal	30
30 21 268 Window sealing compound	30
30 15 781 Window sealing compound	31
30 15 211 Noise absorbing panels	31
30 15 799 Noise absorbing panels	32
30 15 807 Sealing compound	32
30 32 349 Magnetic sealing strip	33
30 07 077 Sealing strip	33
30 17 795 Sealing strip	34
30 18 165 Butyl tape	34
30 16 755 Butyl tape	35
Cleaning agents	37
30 02 359 Odour remover A/C kit	37
30 02 367 Odour remover A/C	37
30 02 482 Remover	38
30 02 490 Remover	38
30 08 307 Tar solvent	39
30 04 512 Stain remover	39
30 07 655 Gasket loosener No 4	40
30 02 599 Cleaning agent	40
30 04 520 Anti-corrosion agent	41
30 09 461 Electronic cleaner	41
30 15 815 Cleaning agent	42
Anti-corrosion agents	43
30 15 906 Zink spray	43
30 04 736 Primer, etching	43
30 15 948 Cavity fluid	44
30 15 930 Cavity fluid	44
30 15 989 Underseal	45
30 15 237 Underseal	45
30 15 245 Underseal	46
30 15 963 Stone damage protection	46
30 04 538 Stone damage protection	47
30 15 252 Stone damage protection	47
30 15 476 Stone damage protection	48
30 15 971 Underseal	48
30 15 229 Underseal	49
30 15 914 Protective wax	49
30 18 702 Paint primer	50
Miscellaneous	51
30 06 798 Spray gun	51
30 21 011 Pressure cup gun	51
30 15 500 Multipress pistol	52

30 07 515 Cooling spray	52
30 07 895 Silicone paste	53
30 02 524 Conductive paint	53
30 04 785 Fabric-backed tape black	54
83 95 519 Measuring glass	54
30 31 259 Alu stick	55
30 31 127 Breathing protection mask	55
30 31 135 Breathing protection mask	56
30 34 428 Filter	56
30 31 143 Fresh air system	57
Index, part numerical sequence	59
Index, alphabetical order	61
Feedback from Importer to Saab Automobile AB	64



SAAB

**PRODUCT CATALOGUE
CHEMICALS**

Introduction

When repairing cars, it is necessary to use various chemicals when work has been done that has damaged seals, rust-proofing, etc.

It is important that the correct materials are used in order to ensure high quality of all repairs. The products are presented here in order to give a good overview of the product range, and the list will be updated as new products are added and other products are removed.

All products can be ordered through a regular spare parts order under **type signal 16**.

The following headings are used in the catalogue:

Specifications

A short description is given of the product's characteristics.

Saab application

A description is given as to what the primary application is for the material.

Packaging

The number of items per package is given.

Transport

Some of the products are classified as dangerous goods when transporting.

According to international regulations, these products must be transported in approved special packaging, and special markings and a warning label must be affixed on the package.

This means that indicated lead times may be affected and that costs for packaging and transporting increase.

Directives

Maintain greatest possible personal cleanliness when handling chemicals. Wash your hands before meals and at the end of the working day. Avoid inhaling vapours/mist. Avoid contact with eyes and skin.

Packages containing flammable goods should be kept sealed and stored in adequately ventilated areas. These products must be kept separate from materials that may ignite them – Smoking is prohibited. Make sure that ventilation is adequate in the storage area.

Further information with respect to each product is available on the Product Information Sheet. The Product Information Sheet is available from the national manager at the Parts Assistance Centre (PAC). In the future, this information will also be distributed on CD-ROM.

Notes

Space for your own notes.

Accident prevention measures

Technical measures

- Make sure that ventilation is adequate. If proper ventilation cannot be achieved, use suitable breathing protection.

Personal measures

- Use protective safety glasses or a facial shield when there is a risk of chemicals splashing into the eyes.
- If long exposure to or repeated contact with the product is unavoidable, use protective gloves.
- Wash contaminated clothing before they are used again.

First aid

- Inhalation:
If vapour/mist have been inhaled, move to fresh air, rest.
- Eye contact:
If there is contact with the eyes, flush with plenty of water for at least 15 minutes. If symptoms persist, contact a physician.
- Skin contact:
In case of skin contact, wash immediately with soap and water. If symptoms persist, contact a physicia.
- In case of an accident, nausea or other effects:
Contact a physician. If possible, show the label of the product involved.

Adhesive

74 96 292 Thread locking adhesive

Specifications

Loctite 270D. For locking of screws and bolts. **Strong**. 50 ml bottle.

Saab application

Thread locking adhesive for bolts in flywheel and universal joint driver.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

Repeated or prolonged contact with sensitive or scratched skin may cause allergic reactions. Use Loctite dosage equipment in order to avoid skin and eye contact.



Notes.....

74 96 268 Thread locking adhesive

Specifications

Loctite 242. Anaerobic thread adhesive. **Normal**. 50 m bottle.

Saab application

For example, manual transmissions and brake calipers.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

Repeated or prolonged contact with sensitive or scratched skin may cause allergic reactions. Use Loctite dosage equipment in order to avoid skin and eye contact.



Notes.....

6 Adhesive

74 96 276 Thread locking adhesive

Specifications

Loctite 648. Locking fluid, **high temperature. Strong.** NOTE! Must not be used together with aluminium. 50 ml bottle.

Saab application

Splines front wheel hub Saab 9000. Thread locking compound for lock nut on universal joint Saab 9000 and Saab 99/90/900 -M93 pinion nut, outer universal joint.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

The product is an irritant. May irritate the eyes and skin. In case of splash in eyes, flush with plenty of water and contact a physician. In case of skin contact, wash immediately with soap and water.

Use Loctite dosage equipment in order to avoid contact with eyes and skin.



Notes.....

49 04 090 Adhesive

Specifications

Loctite 638. 3 ml tube.

Saab application

For sealing of clutch slave cylinder against the gearbox on Saab 900 Sensoric and Saab 9000 M92- from gearbox number D41693.

Packaging

Transport

No restrictions apply when transporting this product.

Directives

The product is hazardous to personal health. Harmful in case of skin contact. Irritates eyes and skin. Risk of serious eye injuries. May cause allergic reactions in case of skin contact. In case of eye contact, flush immediately with plenty of water and call a physician. In case of skin contact, wash immediately with soap and water.

Use Loctite dosage equipment in order to avoid contact with eyes and skin.



Notes.....

30 04 769 Bodywork adhesive

Specifications

Teroson Teromix 6700 (T305). Dual-component polyurethane adhesive for gluing of body details.

Saab application

Shaping of door panel.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

The product is hazardous to personal health. Contains isocyanates. Dangerous if inhaled. Irritates eyes, respiratory organs and skin. May cause allergic reaction if inhaled. Avoid inhaling vapours/mist. In case of eye contact, flush immediately with plenty of water and call a physician. In case of skin contact, wash immediately with soap and water. Make sure that ventilation is adequate.



Notes.....

30 18 702 Paint primer

Specifications

Betaprime 5402. Red lid. 30 ml container.

Saab application

For adhesive kits Saab 30 05 600 and 30 05 618.

Packaging


1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is highly flammable and dangerous to personal health. Contains isocyanates. May cause allergic reaction if inhaled. Irritates eyes and respiratory organs. Can be dangerous if inhaled after prolonged and repeated exposure. Dehydrates the skin. Avoid inhaling vapours/mist. Avoid skin contact. Make sure that ventilation is adequate.

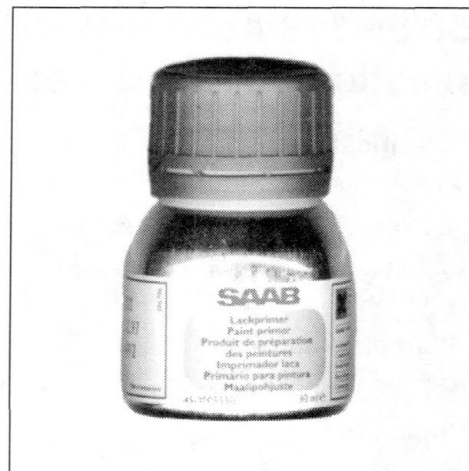

Notes.....

30 05 600 Adhesive kit, window glass

Specifications

Dual-component (2K-PUR).

- Adhesive Betamate E2400, cartridge contains 2x225 ml.
- Glass activator Betawipe 04604 (yellow lid) with applicator for the glass, 30 ml can.
- Glass primer Betamate 5001 (green lid) with applicator for glass and retainer moulding for the windscreen on Saab 9000, 30 ml can.
- Lint-free cloth.
- Spout for applying adhesive.

Saab application

Windscreen and rear window Saab 9000 and Saab 9-5.

Windscreen Saab 900 M94- and Saab 9-3.

Packaging

1


Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is highly flammable and irritating. Irritates eyes and respiratory organs. Avoid inhaling vapours/mist. Avoid contact with eyes and skin. Make sure that ventilation is adequate.

Notes

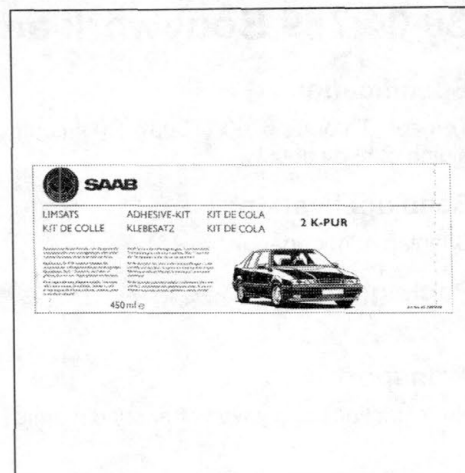

30 05 618 Adhesive kit, plastic-imbedded glass.

Specifications

Dual-component (2K-PUR).

- Adhesive Betamate E2400, cartridge contains 2x225 ml.
- RIM-activator Betawipe 4000 (blue lid), which is a special primer for imbedded glass, with applicator and wiper, 30 ml can.

Saab application

Rear window Saab 900 M94- 3d, 5d, Saab 9000 CS.

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is highly flammable. Contains isocyanates. Package must be stored in a well ventilated area. Must be stored separately from materials which may cause the product to ignite - Smoking is prohibited. Avoid inhaling vapours. Avoid contact with eyes and skin.

Notes



30 30 699 Adhesive kit rear window CV

Specifications

1 Betaseal 1400 (1K), 300 ml

1 Betaprime 5001, 30 ml

1 Betawipe VP 04604, 30 ml 1 Nozzle 1 Primer applicator 1 Cleaning cloth

Saab application

For glued rear window on Saab 900 Convertible M95-.

Packaging


1

Transport

No restrictions apply when transporting this product.

Directives

Contains isocyanates. Repeated or prolonged exposure with scratched or sensitive skin may cause allergies.

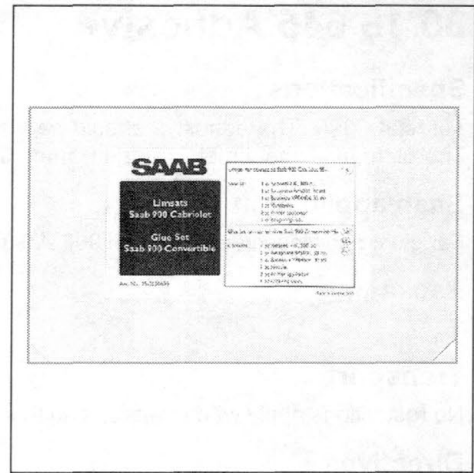

Notes.....

82 93 235 Adhesive

Specifications

Chemtronics CW 2400. Conducts electricity.

Saab application

For example, gluing of contact plates on electrically heated rear window.

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is corrosive and irritating. Dangerous in case of skin contact and if ingested. Irritates eyes and skin. May cause allergic reactions in case of skin contact. Avoid contact with eyes and skin. Avoid inhaling vapours. Make sure that ventilation is adequate.



Notes.....

30 18 645 Adhesive

Specifications

Terostat 7390. The adhesive should be warmed to 100 °– 120° before use. Therefore, use sheet metal nozzle Part no 30 18 652. 380 gramme cartridge.

Saab application

For gluing of windscreen on Saab 900 -M93 with airbag.


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

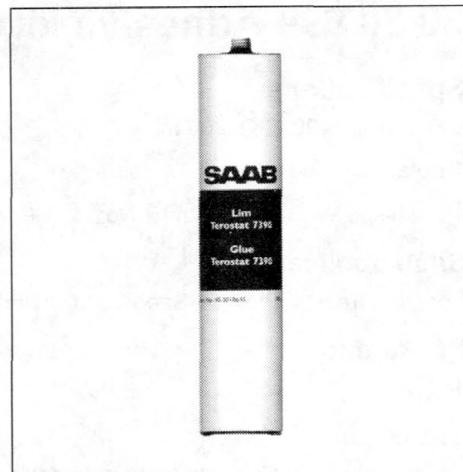

Notes.....

46 20 084 Ultra fast adhesive

Specifications

Sicomet 8200. Single component adhesive based on cyanoacrylate acid esters. 10 g bottle.

Saab application

Adhesive for sealing timing cover 6 cyl Saab 900/9000.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

Cyanoacrylates. Warning! Will quickly glue shut eyes and skin. Avoid contact with eyes and skin. In case product gets into eyes or on the skin, rinse thoroughly with plenty of water and call a physician. Make sure that ventilation is adequate.



Notes.....

30 02 631 Adhesive kit

Specifications

Loctite 406-770.

406, 20 g

770, 10 ml

For gluing plastics with teflon-like surfaces.

Saab application

For example, fixation of camshaft cover rubber gasket.

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

Loctite 406:

Contains cyanoacrylates. Warning! Can quickly glue shut eyes and skin. If case product gets into eyes or on the skin, rinse thoroughly with plenty of water and call a physician. Make sure that ventilation is adequate

Use Loctite dosage equipment in order to avoid contact with eyes and skin.

Loctite 770:

The product is highly flammable. Dehydrates the skin. Inhalation of vapours may cause headache and nausea. Avoid skin contact. Avoid inhalation of vapours. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Must not be emptied into the drain (sewer system).

Notes.....



30 18 652 Nozzle

Specifications

Manufactured of metal. Used for applying Terostat 7390 (30 18 645).


Saab application

Packaging

1

Transport

Directives

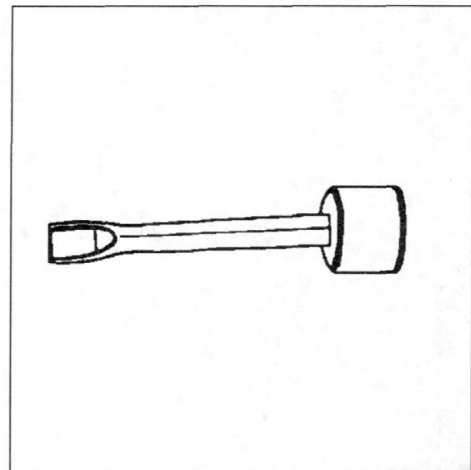

Notes.....

30 08 075 Rubber moulding adhesive

Specifications

3M 8008. Black. 0.15 litre tube.

Saab application

Special adhesive for gluing rubber to metal and paint as well as repairing rubber mouldings.

Packaging


1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is highly flammable. Hazardous to personal health. Dangerous if inhaled. May cause skin irritation after frequently repeated exposure. The package should be firmly closed and stored in a cool and adequately ventilated area. The product must not be exposed to heat. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Avoid inhaling vapours.

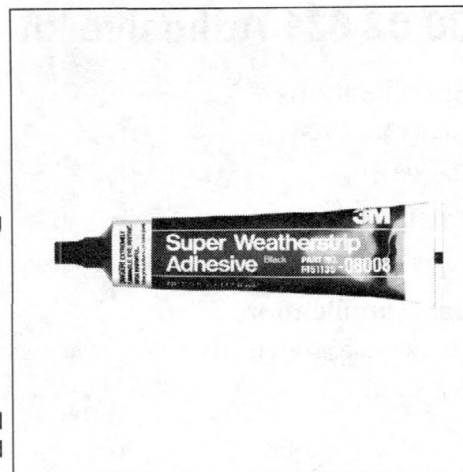

Notes.....

Lubricants

87 81 684 Universal paste

Specifications

Molykote G-rapid plus paste. For use when fitting and running in application surfaces. Prevents "Stickslip" when press fitting. Applied sparingly and evenly on de-greased surfaces. Temperature -35°C - $+450^{\circ}\text{C}$. 50 gramme tube.

Saab application

Universal paste for splines on primary shaft.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

Avoid skin and eye contact.



Notes.....

30 20 971 Screw-thread paste

Specifications

Molykote 1000. 100 gramme tube.

Saab application

For example, lubrication of valve guides in turbocharger.


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

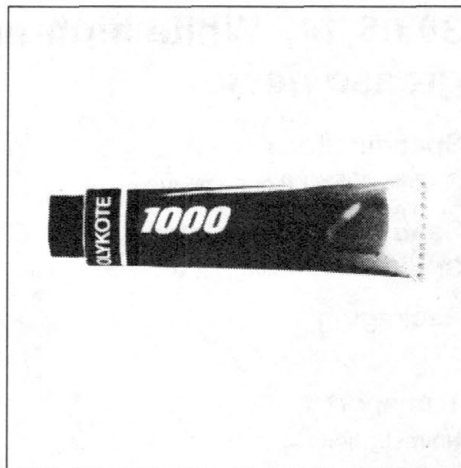

Notes.....

30 20 476 Ball bearing grease

Specifications

Molykote 33. Medium. Temperature interval -73 °C to +180 °C.
100 gramme tube.

Saab application

Bushing grease for anti-roll bar, lubrication of sunroof. Replaces Molykote 7348 for greasing sunroof.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

Avoid skin and eye contact.



Notes.....

30 06 442 White high-pressure grease paste

Specifications

Gleitmo 805. 100 gramme tube.

Saab application

Grease for lubricating, for example, parking brake lever Saab 900 -M87.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

Can be dangerous in case of prolonged exposure to skin. Avoid skin contact.



Notes.....

82 93 243 Low temperature grease

Specifications

Gleitmo 585-K. 50 gramme tube.

Saab application

Lubrication of release button on Saab 9-3 automatic and 9-5 automatic.

Also for oscillating glide surfaces.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives



Notes.....

30 07 309 Silicone paste

Specifications

Gleitmo 750. 100 gramme tube.

Saab application

Lubrication of O-rings and gaskets during assembly.

Lubricating gear-lever ball.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives



Notes.....

30 06 582 Lubricating fluid

Specifications

Gleitmo 880. Penetrating oil with white solid lubricants. 400 ml spray can.

Saab application

For hinges, door locks, etc.

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is extremely flammable. May be hazardous if inhaled after frequent and repeated exposure. May be hazardous in case of prolonged skin contact. Pressurized can. Must not be exposed to direct sunlight or temperatures above +50 °C. Must not be punctured or burned. Also applies to empty can. Do not spray toward open flame or glowing materials. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Make sure that ventilation is adequate. Avoid inhaling spray mist. Avoid eye and skin contact.



Notes.....

30 06 954 Anti-seize lubricant PFTE

Specifications

Gleitmo 980. For metal, plastic, rubber, wood, leather, paper board and ceramics (dry lubricant). Good lubricating and anti-seize properties. 400 ml spray can.

Saab application

Plastic parts in gear-lever housing Saab 900/9000.

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is extremely flammable. May be hazardous if inhaled after frequent and repeated exposure. May be hazardous in case of prolonged skin contact. Pressurized can. Must not be exposed to direct sunlight or temperatures above +50 °C. Must not be punctured or burned. Also applies to empty can. Do not spray toward open flame or glowing materials. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Make sure that ventilation is adequate. Avoid inhaling spray mist. Avoid eye and skin contact.



Notes.....

30 08 604 Clean dry lubricating film

Specifications

Gleitmo 300. Silicone wax. Colourless. Free of oil and grease. 400 ml spray can.

Saab application

Invisible lubricating film for lubricating seat belts, rubber, plastic and interior parts.

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is extremely flammable. May be hazardous if inhaled after frequent and repeated exposure. May be hazardous to skin in case of prolonged exposure. Pressurized can. Must not be exposed to direct sunlight or temperatures above +50 °C. Must not be punctured or burned. Also applies to empty can. Do not spray toward open flame or glowing materials. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Avoid inhaling spray mist. Avoid skin and eye contact. Make sure that ventilation is adequate.



Notes.....

30 08 612 Chain grease

Specifications

Gleitmo 540. Synthetic adhesive grease with molybdenum disulphide. 500 ml bottle.

Saab application

For example, for brake caliper sliding surfaces. Saab 900 -M87 (front).

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is flammable. May be hazardous if inhaled after frequent and repeated exposure. May be hazardous in case of prolonged skin contact. Avoid inhaling vapours/mist. Avoid skin contact. Make sure there is adequate ventilation. Must not be poured down the drain.



Notes.....

49 04 108 Brake cylinder paste

Specifications

ATE

Saab application

For lubrication of seals in the hydraulic parts of the clutch and brake systems.


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

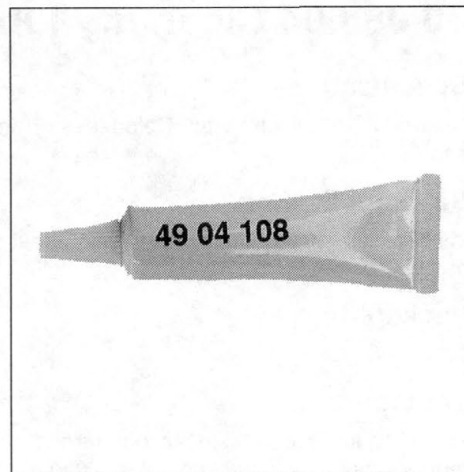

Notes.....

30 07 457 Copper grease

Specifications

PBC. 125 gramme tube.

Saab application

For brake caliper sliding surfaces, for example.


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

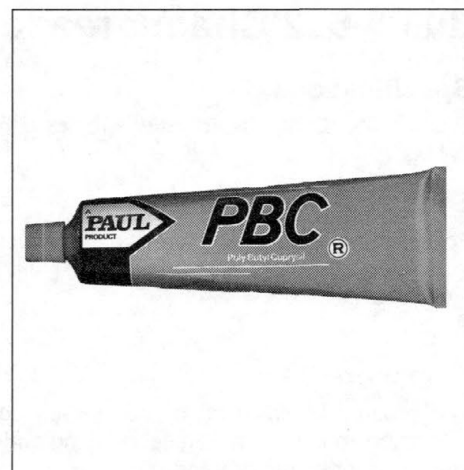

Notes.....

30 07 481 Copper grease

Specifications

PBC. 500 gramme can.

Saab application

For brake caliper sliding surfaces, for example.


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

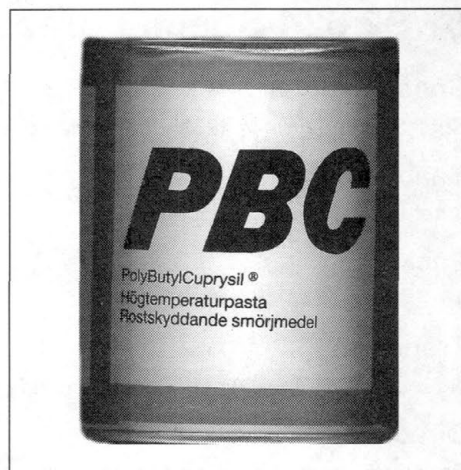

Notes.....

30 06 665 Vaseline

Specifications

0.8 kg can.

Saab application

For battery terminals, for example.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives



Notes.....

87 92 624 Special grease

Specifications

Shell Stamina grease 0233. Low friction grease. 300 gramme cartridge.

Saab application

Inner universal joint, tripod type.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

Prolonged or repeated skin contact may cause skin irritation. Avoid skin contact.



Notes.....

87 81 676 Special grease

Specifications

Molykote VN 2461 C. 300 gramme cartridge.

Saab application

Special grease for universal joint inner (Rzeppa) and outer.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives



Notes.....

87 81 718 Silicone grease

Specifications

Molykote PG21. Silicone grease for long-term lubrication of plastic/metal, plastic/plastic, and rubber/metal combinations. Temperature $-50\text{ }^{\circ}\text{C} > +190\text{ }^{\circ}\text{C}$. 10 gramme tube.

Saab application

Silicone grease for bushing and clutch lever Saab 900 M94-, for clutch cable end connected to clutch pedal.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

Repeated or prolonged contact with scratched or sensitive skin may cause allergic reactions. Avoid skin and eye contact.



Notes.....

30 15 286 Vaseline

Specifications

Klüber Syntheso Pro AA2. Synthetic assembly grease. For lubricating and greasing nitrile rings or EPDM rubber materials. 25 gramme tube.

Saab application

NOTE! For AC/ACC with refrigerant R134A.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives



Notes.....

40 74 787 Compressor oil

Specifications

PAG ISO 100. 20 ml tube.

Saab application

AC-compressor oil for R134a.

Saab 9000: Seiko-Seiki.

Saab 900: Seiko-Seiki.

Saab 9-3: Harrison.

Packaging

12

Transport

No restrictions apply when transporting this product.

Directives



Notes.....

47 59 106 Compressor oil

Specifications

PAG ISO 46. 20 ml tube.

Saab application

AC-compressor oil for R134a.

Sabb 9000: Sanden.

Saab 9-3: Sanden.

Saab 9-5: Nippon Denso.

Packaging

12

Transport

No restrictions apply when transporting this product.

Directives



Notes.....

30 19 312 Anti-friction agent

Specifications

Krytox. 56.7 gramme tube.

Saab application

Prevents drying out of rubber seal in DI-ignition discharge unit.


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

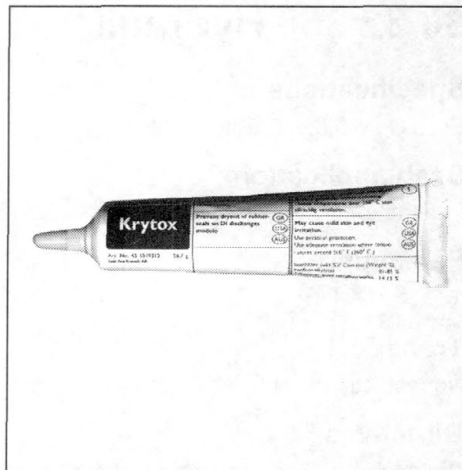

Notes.....

30 18 694 Hydraulic oil

Specifications

Aeroshell R-fluid. 1 litre bottle.

Saab application

For soft top hydraulic system Saab 900 Convertible -M94.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

Prolonged or repeated skin contact may cause skin irritation. Avoid skin contact.



Notes.....

30 32 356 Hydraulic oil

Specifications

Esso Univis J26. 0.5 litre bottle.

Saab application

For soft top hydraulic system Saab 9-3 Convertible.

Packaging


1

Transport

No restrictions apply when transporting this product.

Directives

Prolonged or repeated skin contact may cause skin irritation. Avoid skin contact.

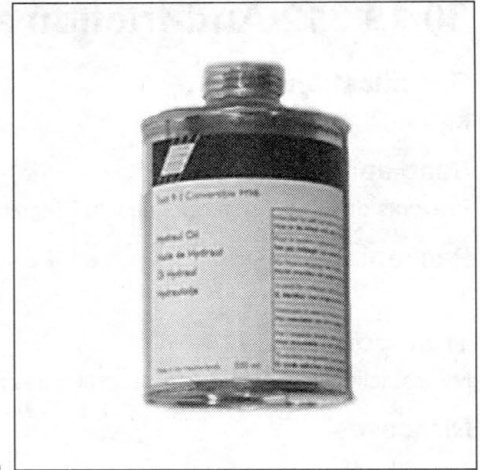

Notes.....

30 09 800 Power steering fluid

Specifications

For Saab. PS 4634. 0.75 litre bottle.

Saab application

Only up to and including: Saab 900 M97 chassis nr V2022749, Saab 9000 M97 chassis nr V1014201, Saab 900 Convertible M96 Chassis nr DT7003150.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

Not mixable with CHF 11S, part number 30 32 380.



Notes.....

30 32 380 Power steering fluid

Specifications

For Saab. CHF 11S. 1,0 litre bottle.

Saab application

Used from: Saab 900 M97 chassis nr V2022750, Saab 9000 M97 chassis nr V1014202, Saab 900 Convertible M96 chassis number DT7003151, Saab 9-5.

Packaging


1

Transport

No restrictions apply when transporting this product.

Directives

Not mixable with PS 4634, part number 30 09 800.

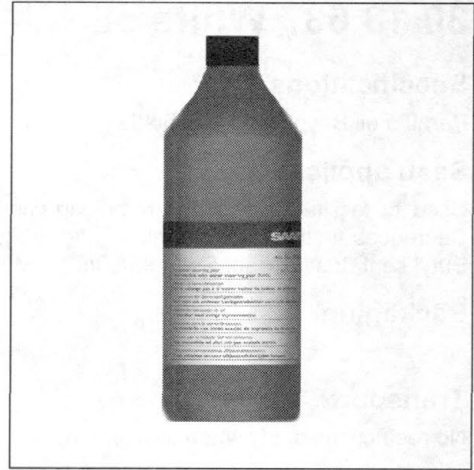

Notes.....

87 81 668 Fluid

Specifications

Lubeguard ATF. Additive for automatic transmission oil. 150 ml.

Saab application

Additive for automatic transmission oil Saab 9000. When noise can be heard when shifting 2-3.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

May be harmful if ingested.



Notes.....

30 18 637 White oil

Specifications

Paraffin oil Bayol 82. 1 litre bottle.

Saab application

Used to facilitate fitting and removing window glass with rubber moulding. Decreases friction between glass and rubber moulding without affecting the Butyl seal Bostik 1590. Saab 99/90/900 -M93.


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

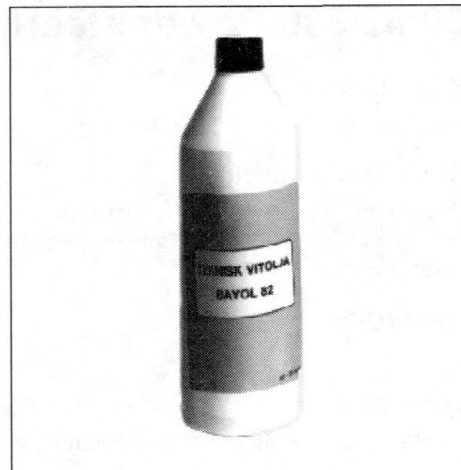

Notes.....

30 32 497 Krytox Aerosol

Specifications

KSP 105. 100 ml spray.

Saab application

Lubrication of window slide rails.

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is not flammable. Pressurized can. Must not be exposed to direct sunlight or temperatures above +50 °C. Must not be punctured or burned. Also applies to empty can. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Make sure that ventilation is adequate.



Notes.....

Sealing compounds

74 96 284 Thread locking adhesive

Specifications

Loctite 577. Thread sealing compound. 50 ml bottle.

Saab application

Thread sealing compound for temperature sensor and union screw 6 cyl Saab 900/9000 as well as bearing support manual gearbox Saab 99/900 -M93, -M94 Convertible.

Sealant for screws engine/gearbox Saab 99/900 -M93, -M94 Convertible.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

Repeated or prolonged contact with scratched or sensitive skin may cause allergic reactions. Irritates eyes and skin. Avoid skin and eye contact.

Use Loctite dosage equipment in order to avoid contact with eyes and skin.



Notes.....

87 81 841 Silicone flange sealant

Specifications

Loctite Ultra Grey 5699. Elastic joint compound. 300 ml cartridge.

Saab application

Replaces 44 91 056 for groove in metal gasket between engine and gearbox Saab 90/99/900 -M93, -M94 Convertible and Saab 9000 2.0 with groove in the oil sump seal surface. AW-transmission housings.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives



93 21 795 Flange sealant

Specifications

Loctite 518. Replaces cut gaskets, quick hardening. 25 ml syringe.

Saab application

All manual gearboxes. Sealing surface 4 cyl engines, not 2.0 l Saab 9000 with groove in oil sump sealing surface.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

The product is an irritant. Irritates eyes and skin. Skin contact may cause allergic reaction. Avoid contact with eyes and skin.



Notes.....

30 32 331 Body sealing compound

Specifications

Togocoll FM 541. 150 ml in 310 ml cartridge.

Saab application

Joint roof C-pillar on Saab 9-5.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

Contains isocyanates. Repeated or prolonged contact with scratched or sensitive skin may cause allergic reactions. Avoid eye and skin contact.



Notes.....

30 07 085 Body sealing compound

Specifications

Teroson Terostat 1K-PUR T216. White. Elastic single component sealant based on polyurethane. Can be painted over using all types of paints, also 2-K paints. 200 ml cartridge "presspack".

Saab application

See Service Manual.

Packaging


1

Transport

No restrictions apply when transporting this product.

Directives

Contains isocyanates. Repeated or prolonged contact with scratched or sensitive skin may cause allergic reactions. Avoid eye and skin contact.

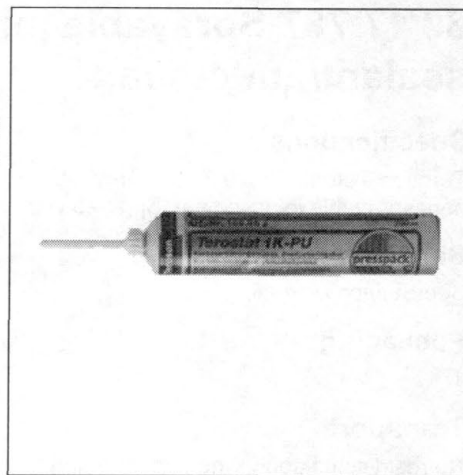

Notes.....

30 07 093 Body sealing compound

Specifications

Teroson Terostat 1K-PUR T226. White. Adhesive body sealant based on polyurethane. Used on visible joints. Does not shrink. Can be painted over also with 2K-paints. 310 ml cartridge.

Saab application

For example, doors and wings.

Packaging


1

Transport

No restrictions apply when transporting this product.

Directives

Contains isocyanates. Repeated or prolonged contact with scratched or sensitive skin may cause allergic reactions. Avoid eye and skin contact.

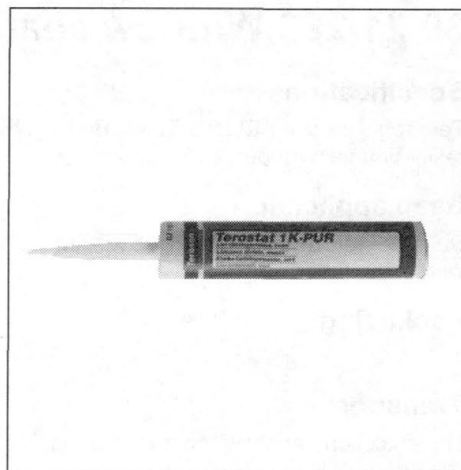

Notes.....

30 Sealing compounds

30 17 787 Sprayable joint sealant/underseal

Specifications

Teroson Terostat 9320 T293. Grey, elastic, permanent-shape single component sprayable joint sealant. Sprayed with Multipress pistol. 310 ml cartridge.

Saab application

See Service Manual.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives



Notes.....

30 21 268 Window sealing compound

Specifications

Teroson Terodicht Elastic T241. Black. Window sealant based on synthetic resin-synthetic rubber. 310 ml cartridge.

Saab application

Suitable for re-sealing of rubber-embedded windscreens, rear and side windows.


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

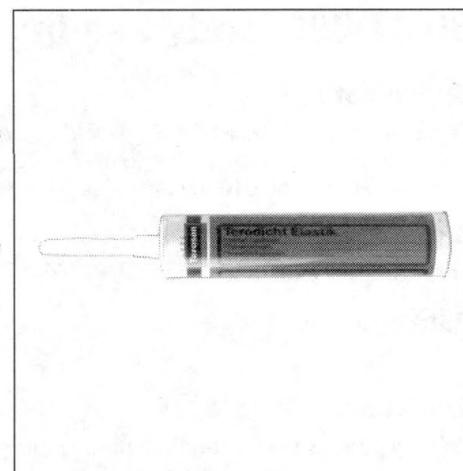

Notes.....

30 15 781 Window sealing compound

Specifications

Teroson Terodicht T242. black. Window sealant based on butyl-rubber. 310 ml cartridge.

Saab application

Suitable for newly installed rubber-embedded front, rear and side windows between rubber moulding and glass as well as rubber moulding and body metal.

Packaging


1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is highly flammable. May be dangerous if inhaled or consumed. Dehydrates skin. Avoid inhaling vapours/mist. Avoid skin contact. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Make sure ventilation is adequate. Must not be poured down the drain.

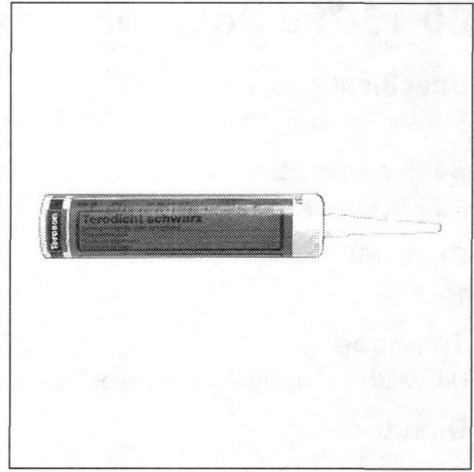

Notes.....

30 15 211 Noise absorbing panels

Specifications

Teroson Terodem SP 300 T411. Package contains 4 panels 50x50 cm.

Saab application

For floor plate, applied with hot-air gun.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives



Notes.....

30 15 799 Noise absorbing panels

Specifications

Teroson Terodem SP 100 ALU T401. Package contains 6 panels 50x25 cm.

Saab application

For doors and body side plates.


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

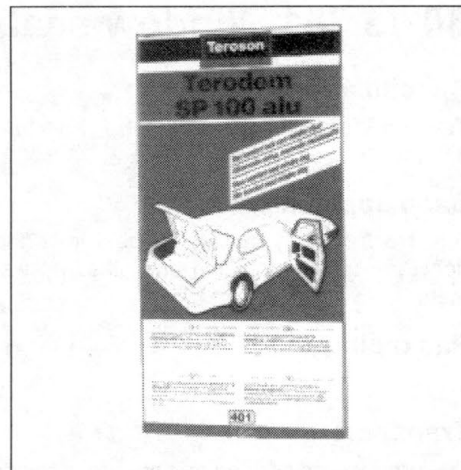

Notes.....

30 15 807 Sealing compound

Specifications

Teroson Terostat IX T236. Grey. Plastic sealant based on synthetic rubber. Pliable. 1 kg can.

Saab application

For sealing large gaps and holes.


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

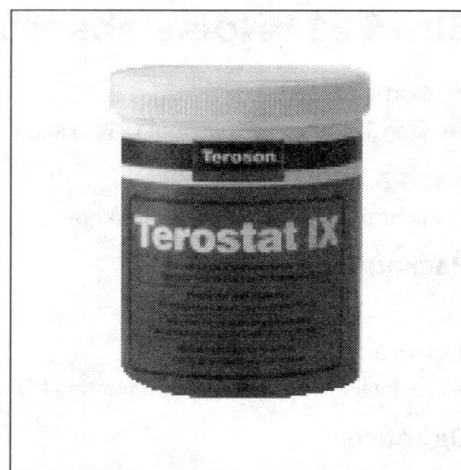

Notes.....

30 32 349 Magnetic sealing strip

Specifications

Togoseal FS 502 S1.

Saab application

Water drain luggage compartment on Saab 9-5.

Packaging

1. Left and right side.

Transport

No restrictions apply when transporting this product.

Directives



Notes.....

30 07 077 Sealing strip

Specifications

Teroson Terostat II (T238). Gray. Plastic sealing strip based on synthetic rubber. 4 rolls of 10 meters each/package, 20x2 mm.

Saab application

For sealing screwed body panels, wings, etc.


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

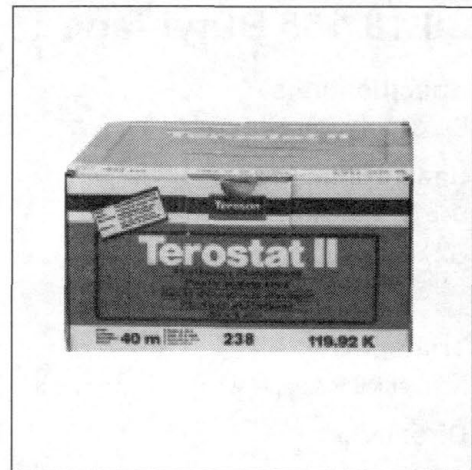

Notes.....

34 Sealing compounds

30 17 795 Sealing strip

Specifications

Teroson Terostat VII Round profile T234. Black. Plastic sealing strip based on synthetic rubber. 4 rolls of 2.5 meters each/package, Ø 10 mm.

Saab application

For example, sealing and spacing of collision member in doors and sealing of rear light cluster.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives



Notes.....

30 18 165 Butyl tape

Specifications

IDL 310. 12 mm x 45 mm x 1 mm.

Saab application

See Service Manual.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives



Notes.....

30 16 755 Butyl tape

Specifications

Bostik. Black. Ø 6 mm x 8 m.

Saab application

For sealing against metal, plastic and glass.


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

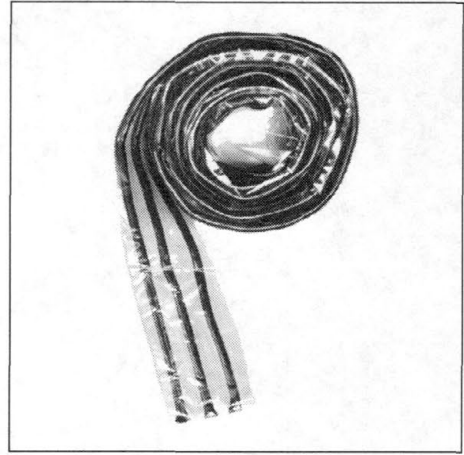

Notes.....

Cleaning agents

30 02 359 Odour remover A/C kit

Specifications

Kit contents:

- spray nozzle
- applicator
- extension piece
- odour remover, 120 ml

Saab application

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives



Notes.....

30 02 367 Odour remover A/C

Specifications

Removes odour and prevents mould. 120 ml bottle.

Saab application

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives



Notes.....

30 02 482 Remover

Specifications

Tempro 75. De-greaser. Water-based. Alkaline concentrate with latex acrylate. 10 litre can.

Saab application

Special de-greaser for de-waxing new cars.

Packaging


1

Transport

No restrictions apply when transporting this product.

Directives

The product is an irritant. Irritates skin. Risk of serious eye injuries. Avoid skin and eye contact. In case of splash in eyes, flush immediately with plenty of water and call a physician.

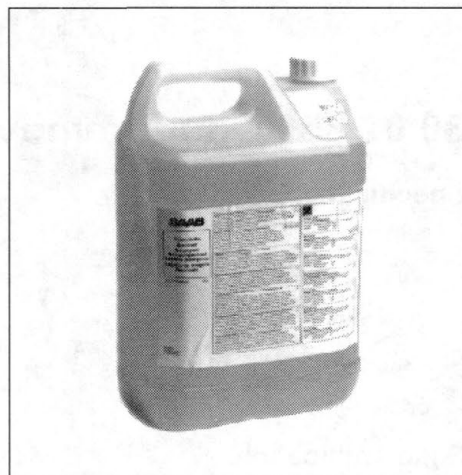

Notes.....

30 02 490 Remover

Specifications

Tempro 75. De-greaser. Water-based. Alkaline concentrate with latex acrylate. 25 litre can.

Saab application

Special de-greaser for de-waxing new cars.

Packaging


1

Transport

No restrictions apply when transporting this product.

Directives

The product is an irritant. Irritates skin. Risk of serious eye injuries. Avoid skin and eye contact. In case of splash in eyes, flush immediately with plenty of water and call a physician.

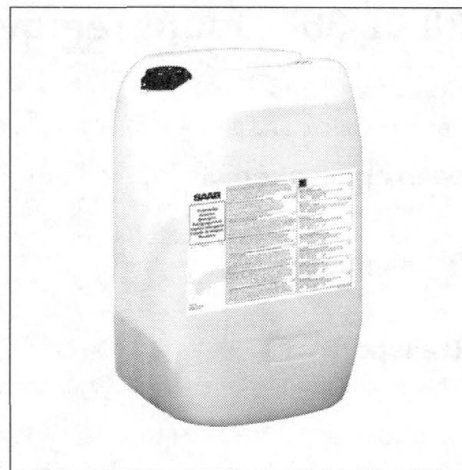

Notes.....

30 08 307 Tar solvent

Specifications

GTI PREPP. Highly aromatic solvent. Petroleum-based. Ready-mixed. 5 litre can.

Saab application

For removing oil and tar on paint and chrome surfaces.

Packaging


1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is flammable and hazardous to personal health. Harmful if inhaled and in case of skin contact. Avoid inhaling vapours/mist. Avoid skin contact. Make sure ventilation is adequate.

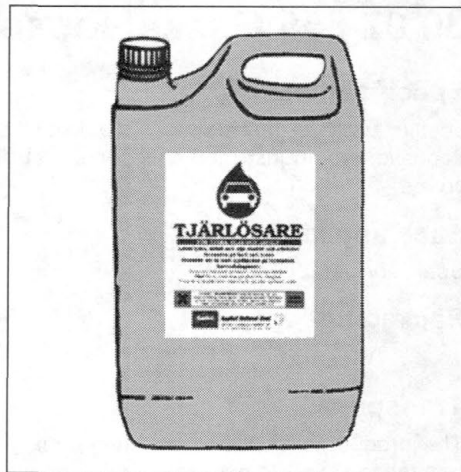

Notes.....

30 04 512 Stain remover

Specifications

Clax-200S. Cleaning agent. 500 ml bottle.

Saab application

Cleaning of convertible soft top on Saab 900 CV -M94.

Packaging


1

Transport

No restrictions apply when transporting this product.

Directives

The product is hazardous to personal health. Harmful if ingested. Irritates eyes and skin. Avoid eye and skin contact.

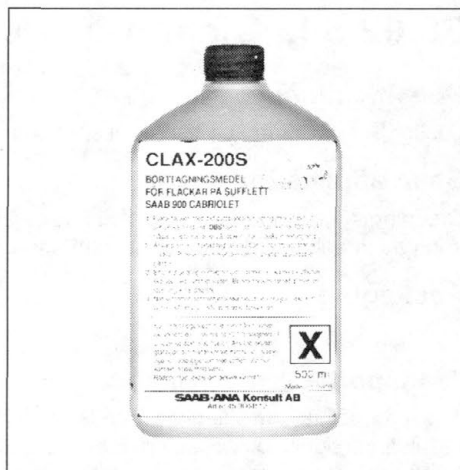

Notes.....

30 07 655 Gasket loosener No 4

Specifications

Loctite. Loosens gaskets and oils baked on by heat, gasket adhesives, carbon deposits, etc. in just moments. Does not damage surfaces. 300 ml aerosol spray.

Saab application

See Service Manual.

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is extremely flammable and irritating. Irritates the eyes and skin. Pressurized can. Must not be exposed to direct sunlight or temperatures above +50 °C. Must not be punctured or burned. Also applies to empty can. Do not spray toward open flame or glowing materials. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Avoid inhalation of spray mist. Make sure ventilation is adequate.



Notes.....

30 02 599 Cleaning agent

Specifications

Loctite Super Clean 7063. 150 ml spray can.

Saab application

Cleaning agent for most materials to be glued with Loctite anaerobic products, such as thread locker, thread sealant and products for mounting bushings.

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is extremely flammable. Dehydrates the skin. May be hazardous if inhaled after frequent and repeated exposure. Pressurized can. Must not be exposed to direct sunlight or temperatures above +50 °C. Must not be punctured or burned. Also applies to empty can. Do not spray toward open flame or glowing materials. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Avoid inhalation of spray mist. Make sure ventilation is adequate.



Notes.....

30 04 520 Anti-corrosion agent

Specifications

Kontakt 61. special agent for corrosion protection on new contacts and electromechanical drive mechanisms. Removes dirt, resin, oil, metallic residue. Long-term protection against corrosion. Highly effective lubricant of precision-manufactured drive mechanisms. 200 ml spray can.

Saab application

Connectors, electrical connections (not on oxygen sensor).

Packaging


1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is highly flammable. Harmful if inhaled. Irritates eyes. Dehydrates skin. Pressurized can. Must not be exposed to direct sunlight or temperatures above +50 °C. Must not be punctured or burned. Also applies to empty can. Do not spray toward open flame or glowing materials. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Avoid inhalation of spray mist. Avoid skin and eye contact. Make sure that ventilation is adequate.

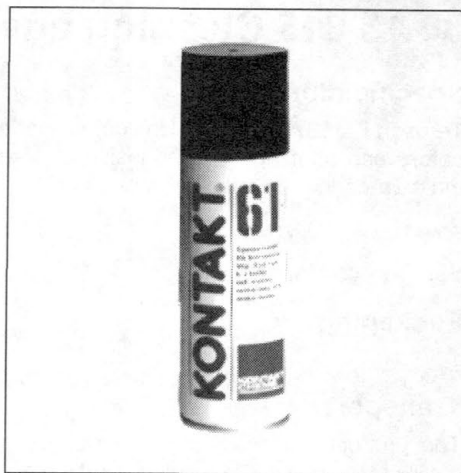

Notes.....

30 09 461 Electronic cleaner

Specifications

ULS 200/400. Cleaning agent for sensitive electronic/electric equipment. removes grease, moisture. Evaporates completely. 200 ml spray can.

Saab application

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is extremely flammable. Dehydrates the skin. May be harmful if inhaled after frequently repeated exposure. May be poisonous if ingested. Pressurized can. Must not be exposed to direct sunlight or temperatures above +50 °C. Must not be punctured or burned. Also applies to empty can. Do not spray toward open flame or glowing materials. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Avoid inhalation of spray mist. Make sure ventilation is adequate.



Notes.....

30 15 815 Cleaning agent

Specifications

Teroson FL T875 Thinner. Universal cleaner. Cleaning agent for all surfaces before and after applying adhesive and sealant. Also a suitable thinner for most Teroson products. 1 litre can.

Saab application

See Service Manual.

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is flammable. May be hazardous if inhaled after frequent and repeated exposure. May be poisonous if ingested. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Must not be poured down the drain. Take appropriate actions to eliminate static electricity. Make sure that ventilation is adequate.



Notes.....

Anti-corrosion agents

30 15 906 Zink spray

Specifications

Teroson T183 zinc spray. Grey, quick-drying zinc-based anti-corrosion agent, weldable. 300 ml spray can.

Saab application

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is extremely flammable. When it is used, combustible/explosive vapour-air mixtures may be produced. May be hazardous if inhaled after frequent and repeated exposure. Pressurized can. Must not be exposed to direct sunlight or temperatures above +50 °C. Must not be punctured or burned. Also applies to empty can. Do not spray toward open flame or glowing materials. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Avoid inhaling spray mist. Make sure that ventilation is adequate.



Notes.....

30 04 736 Primer, etching

Specifications

Stadox 1K-Füllprimer. Acid-hardening. For normal and galvanized sheet metal. 1 litre can.

Saab application

Packaging


1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is flammable. May be hazardous if inhaled after frequent and repeated exposure. Dehydrates the skin. Avoid inhaling vapours/mist. Avoid skin contact. Make sure that ventilation is adequate.

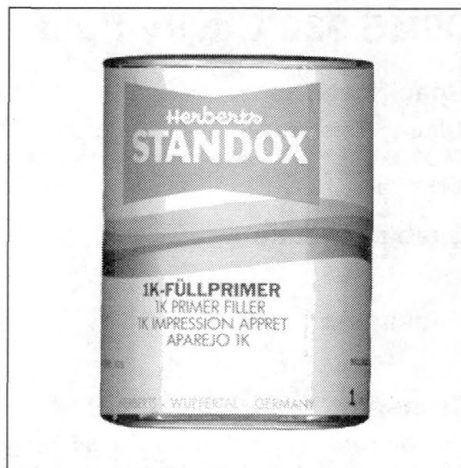

Notes.....

30 15 948 Cavity fluid

Specifications

Teroson Terotex HV 200 Extra T108. Wax-based cavity fluid with anti-corrosion additive, high penetrating capacity. 500 ml spray can.

Saab application

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is highly flammable. May be hazardous if inhaled after frequent and repeated exposure. May be harmful if ingested. Dehydrates skin. Pressurized can. Must not be exposed to direct sunlight or temperatures above +50 °C. Must not be punctured or burned. Also applies to empty can. Do not spray toward open flame or glowing materials. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Avoid inhaling spray mist. Make sure that ventilation is adequate.



Notes.....

30 15 930 Cavity fluid

Specifications

Teroson Terotex HV 400 T129. Applied with HV compressed-air spray gun T931, 3021011. Resin and wax-based cavity fluid, high penetrating capacity. 1 litre can.

Saab application

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is flammable. When used, combustible/explosive vapour-air mixtures may be produced. May be hazardous if inhaled after frequent and repeated exposure. Avoid inhaling vapours/mist. Avoid skin contact. Make sure that ventilation is adequate.



Notes.....

30 15 989 Underseal

Specifications

Teroson T102 rubber and resin-based underseal. Can be painted over. 500 ml spray can.

Saab application

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is highly flammable. May be hazardous if inhaled after frequent and repeated exposure. May be harmful if ingested. Dehydrates skin. Pressurized can. Must not be exposed to direct sunlight or temperatures above +50 °C. Must not be punctured or burned. Also applies to empty can. Do not spray toward open flame or glowing materials. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Avoid inhaling spray mist. Make sure that ventilation is adequate.



Notes.....

30 15 237 Underseal

Specifications

Teroson Terotex 2000 T122 (black). Applied with UBS-spray gun T910, 30 06 798. Rubber and resin-based underseal, can be painted over. 1 litre can.

Saab application

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is highly flammable. When used, combustible/explosive vapour-air mixtures can be produced. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Must not be poured down the drain. Take appropriate actions to eliminate static electricity. Make sure that ventilation is adequate.



Notes.....

30 15 245 Underseal

Specifications

Teroson Terotex 2000 T123 (light). Applied with UBS-spray gun T910, 30 06 798. Rubber and resin-based underseal, can be painted over. 1 litre can.

Saab application

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is highly flammable. When used, combustible/explosive vapour-air mixtures can be produced. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Must not be poured down the drain. Take appropriate actions to eliminate static electricity. Make sure that ventilation is adequate.



Notes.....

30 15 963 Stone damage protection

Specifications

Teroson Terotex Super 3000 T106 (black) plastic-based stone damage protection, quick-drying and can be painted over. 500 ml spray can.

Saab application

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is highly flammable. Hazardous to personal health. Hazardous when inhaled and in case of skin contact. Pressurized can. Must not be exposed to direct sunlight or temperatures above +50 °C. Must not be punctured or burned. Also applies to empty can. Do not spray toward open flame or glowing materials. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Avoid inhaling spray mist. Avoid skin and eye contact. Make sure that ventilation is adequate.



Notes.....

30 04 538 Stone damage protection

Specifications

Teroson Terotex Super 3000 T107 (light) plastic-based stone damage protection, quick-drying and can be painted over. 500 ml spray can.

Saab application

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is highly flammable. Hazardous to personal health. Hazardous when inhaled and in case of skin contact. Pressurized can. Must not be exposed to direct sunlight or temperatures above +50 °C. Must not be punctured or burned. Also applies to empty can. Do not spray toward open flame or glowing materials. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Avoid inhaling spray mist. Avoid skin and eye contact. Make sure that ventilation is adequate.



Notes.....

30 15 252 Stone damage protection

Specifications

Teroson terotex Super 3000 T126 (black). Applied with UBS-spray gun T910, 30 06 798. Plastic-based stone damage protection, quick-drying and can be painted over. 1 litre can.

Saab application

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is flammable and hazardous to personal health. When it is used, combustible/explosive vapour-air mixtures may be produced. Hazardous if inhaled and in case of skin contact. Irritates skin. Avoid eye and skin contact. Avoid inhaling vapours/mist. Make sure that ventilation is adequate.



Notes.....

30 15 476 Stone damage protection

Specifications

Teroson Terotex Super 3000 T127 (light). Applied with UBS-spray gun T910, 30 06 798. Plastic-based stone damage protection, quick-drying and can be painted over when mixed with original paint. 1 litre can.

Saab application

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is flammable and hazardous to personal health. When used, combustible/explosive vapour-air mixtures may be produced. Hazardous if inhaled and in case of skin contact. Irritates skin. Avoid eye and skin contact. Avoid inhaling vapours/mist. Make sure that ventilation is adequate.



Notes.....

30 15 971 Underseal

Specifications

Teroson Terotex wax T104. Wax-based underseal, high penetrating capacity. 500 ml spray can.

Saab application

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is extremely flammable. May be hazardous when inhaled or ingested. Dehydrates the skin. Pressurized can. Must not be exposed to direct sunlight or temperatures above +50 °C. Must not be punctured or burned. Also applies to empty can. Do not spray toward open flame or glowing materials. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Avoid inhaling spray mist. Make sure that ventilation is adequate.



Notes.....

30 15 229 Underseal

Specifications

Teroson Terotex wax T124. Wax-based underseal, high penetrating capacity. Applied with UBS-spray gun T910, 30 06 798. 1 litre can.

Saab application

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is flammable. May be hazardous if inhaled or ingested. Dehydrates the skin. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Avoid inhaling spray mist. Make sure that ventilation is adequate.



Notes.....

30 15 914 Protective wax

Specifications

Teroson protective wax T184. 300 ml spray can.

Saab application

Transparent wax-based anti-corrosion agent for use on exposed areas, for example, in engine compartment.

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is extremely flammable. Dehydrates the skin. May be harmful if inhaled after frequently repeated exposure. May be poisonous if ingested. Pressurized can. Must not be exposed to direct sunlight or temperatures above +50 °C. Must not be punctured or burned. Also applies to empty can. Do not spray toward open flame or glowing materials. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Avoid inhalation of spray mist. Make sure ventilation is adequate.



Notes.....

30 18 702 Paint primer

Specifications

Betaprime 5402. Red lid. 30 ml container.

Saab application

For adhesive kits Saab 30 05 600 and 30 05 618.

Packaging


1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is highly flammable and dangerous to personal health. Contains isocyanates. May cause allergic reaction if inhaled. Irritates eyes and respiratory organs. Can be dangerous if inhaled after prolonged and repeated exposure. Dehydrates the skin. Avoid inhaling vapours/mist. Avoid skin contact. Make sure that ventilation is adequate.

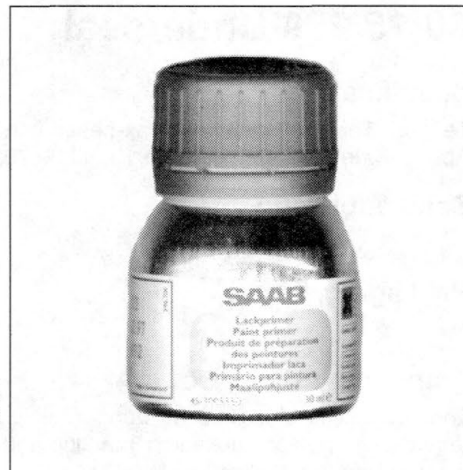

Notes.....

Miscellaneous

30 06 798 Spray gun

Specifications

UBS-spray gun T910. For 1 litre can with screw-on threads.

Saab application


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

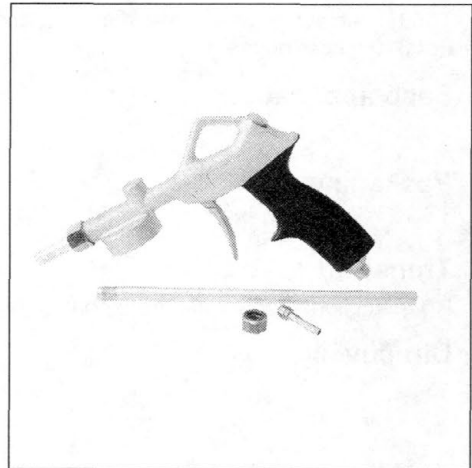

Notes.....

30 21 011 Pressure cup gun

Specifications

HV-spray gun T931 with pressure-reducing valve. For 1 litre can.

Saab application


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

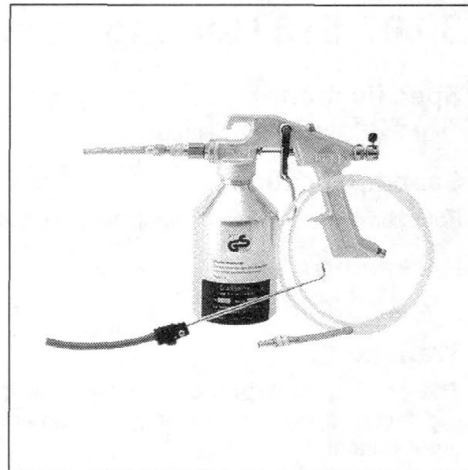

Notes.....

30 15 500 Multipress pistol

Specifications

T959, special gun with dual-circuit air system. Max operating pressure 6 bar. For 310 ml cartridges.

Saab application

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives



Notes.....

30 07 515 Cooling spray

Specifications

Frigi-Test Oxyd-Ex. 250 ml bottle.

Saab application

For example, checking of electrically heated seats.

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is not flammable. There is danger of frostbite in case of skin contact. Pressurized can. Must not be exposed to direct sunlight or temperatures above +50 °C. Must not be punctured or burned. Also applies to empty can. Must be stored separately from materials which may ignite the product – Smoking is prohibited. Make sure that ventilation is adequate. Avoid skin and eye contact.



Notes.....

30 07 895 Silicone paste

Specifications

Electrolube HTC 10S. Conducts heat. White. 10 ml tube.

Saab application

Used when replacing power modules and/or heat sinks in ignition systems.


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

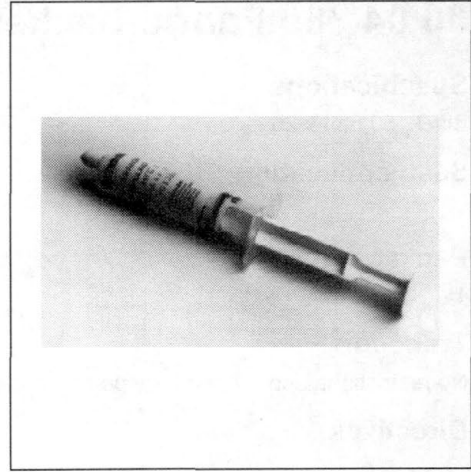

Notes.....

30 02 524 Conductive paint

Specifications

1.42 gramme bottle.

Saab application

Repairing heating coils on electrically heated rear windows.

Packaging

1

Transport

The product is classified as dangerous goods when transporting. Special regulations apply to packaging, marking and transport, therefore existing lead times cannot be guaranteed.

Directives

The product is highly flammable. May be hazardous if inhaled after frequent and repeated exposure. Dehydrates the skin. Avoid inhaling vapours/mist. Avoid skin contact. Make sure that ventilation is adequate.



Notes.....

30 04 785 Fabric-backed tape black

Specifications

Black. 50 mm x 25 m.

Saab application


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

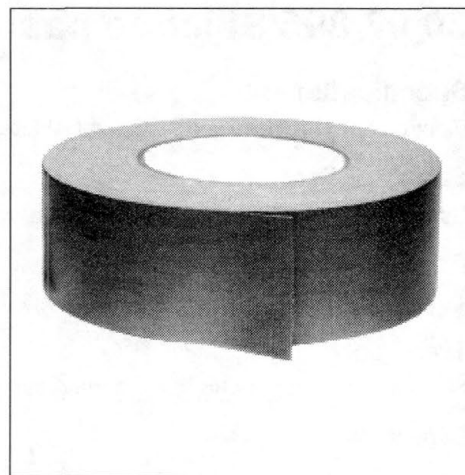

Notes.....

83 95 519 Measuring glass

Specifications

Webasto. Plastic measuring glass. 50 ml volume.

Saab application

For measuring fuel and oil.


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

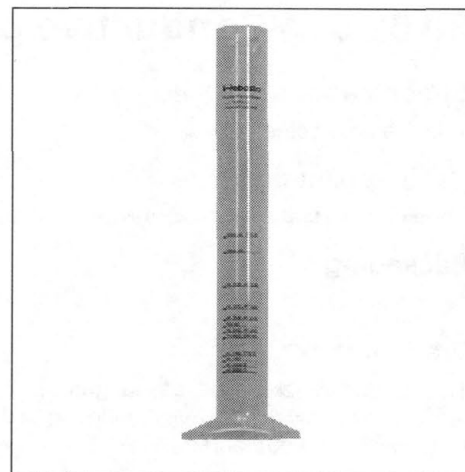

Notes.....

30 31 259 Alu stick

Specifications

Alu stick. 114 gramme tube.

Saab application

For repairing pores in, for example, the engine block.

Packaging


1

Transport

No restrictions apply when transporting this product.

Directives

The product is an irritant. Irritates eyes and skin. May cause allergic reaction in case of skin contact. Avoid skin and eye contact.

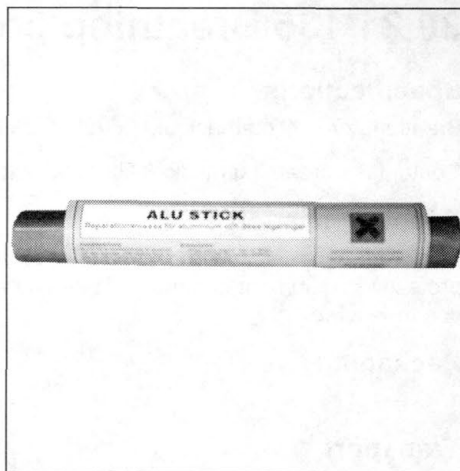

Notes.....

30 31 127 Breathing protection mask

Specifications

Breathing protection 3M 06967. Size **Medium**.

Contents: 1 breathing mask, 8 filters A1 and 10 filters P2.

Saab application

For work with isocyanate products and with products where personal protective equipment is required. See chapter Introduction, Accident prevention measures.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

Note:

- that at least a P3 filter should be used when working with isocyanate products.
- that at least a P3 filter and carbon filter should be used when grinding polyurethane products.



Notes.....

30 31 135 Breathing protection mask

Specifications

Breathing protection mask 3M 06968. Size **Large**.

Contents: 1 breathing mask, 8 filters A1 and 10 filters P2.

Saab application

For work with isocyanate products and with products where personal protective equipment is required. See chapter Introduction, Accident prevention measures.

Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

Note:

- that at least a P3 filter should be used when working with isocyanate products.
- that at least a P3 filter and carbon filter should be used when grinding polyurethane products.



Notes.....

30 34 428 Filter

Specifications

Filter P3 3M 5935 fitting breathing protection mask Saab 30 31 127 (3M 06967) and Saab 30 31 135 (3M 06968).

Contains 10 filters.

Saab application

When working with products where personal protective equipment is required, for example:

- isocyanate products
- polyurethane products (grinding).


Packaging

1

Transport

No restrictions apply when transporting this product.

Directives

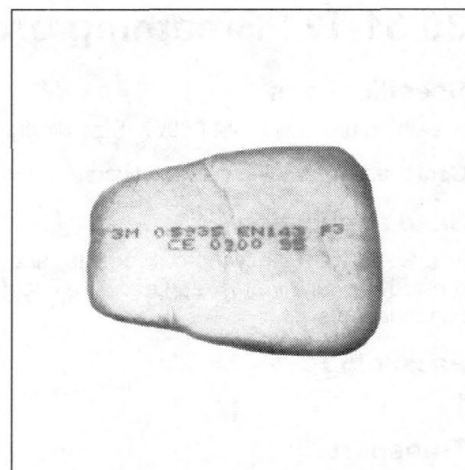

Notes.....

30 31 143 Fresh air system

Specifications

Fresh air system 3M 06970 for breathing mask 30 31 127 and 30 31 135. Contains belt and hose assembly. Supplied excluding breathing mask and equipment for cleaning of inlet air.

Saab application

For work with isocyanate products and with products where personal protective equipment is required. See chapter Introduction, Accident prevention measures.

Packaging


1

Transport

No restrictions apply when transporting this product.

Directives

The inlet air for the breathing mask must be cleaned.

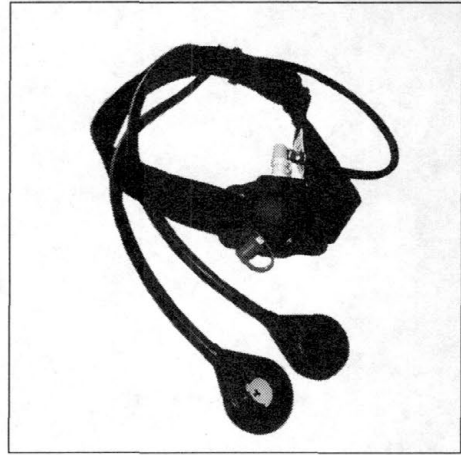

Notes.....



Index, part numerical sequence

30 02 359 Odour remover A/C kit	37	30 15 906 Zink spray	43
30 02 367 Odour remover A/C	37	30 15 914 Protective wax	49
30 02 482 Remover	38	30 15 930 Cavity fluid	44
30 02 490 Remover	38	30 15 948 Cavity fluid	44
30 02 524 Conductive paint	53	30 15 963 Stone damage protection	46
30 02 599 Cleaning agent	40	30 15 971 Underseal	48
30 02 631 Adhesive kit	11	30 15 989 Underseal	45
30 04 512 Stain remover	39	30 16 755 Butyl tape	35
30 04 520 Anti-corrosion agent	41	30 17 787 Sprayable joint sealant/underseal	30
30 04 538 Stone damage protection	47	30 17 795 Sealing strip	34
30 04 736 Primer, etching	43	30 18 165 Butyl tape	34
30 04 769 Bodywork adhesive	7	30 18 637 White oil	26
30 04 785 Fabric-backed tape black	54	30 18 645 Adhesive	10
30 05 600 Adhesive kit, window glass	8	30 18 652 Nozzle	11
30 05 618 Adhesive kit, plastic-imbedded glass	8	30 18 694 Hydraulic oil	23
30 06 442 White high-pressure grease paste	14	30 18 702 Paint primer	50
30 06 582 Lubricating fluid	16	30 18 702 Paint primer	7
30 06 665 Vaseline	19	30 19 312 Anti-friction agent	23
30 06 798 Spray gun	51	30 20 476 Ball bearing grease	14
30 06 954 Anti-seize lubricant PTFE	16	30 20 971 Screw-thread paste	13
30 07 077 Sealing strip	33	30 21 011 Spray gun	51
30 07 085 Body sealing compound	29	30 21 268 Window sealing compound	30
30 07 093 Body sealing compound	29	30 30 699 Adhesive kit rear window CV	9
30 07 309 Silicone paste	15	30 31 127 Breathing protection mask	55
30 07 457 Copper grease	18	30 31 135 Breathing protection mask	56
30 07 481 Copper grease	19	30 31 143 Fresh air system	57
30 07 515 Cooling spray	52	30 31 259 Alustick	55
30 07 655 Gasket loosener No 4	40	30 32 331 Body sealing compound	28
30 07 895 Silicone paste	53	30 32 349 Magnetic sealing strip	33
30 08 075 Rubber moulding adhesive	12	30 32 356 Hydraulic oil	24
30 08 307 Tar solvent	39	30 32 380 Power steering fluid	25
30 08 604 Clean dry lubricating film	17	30 32 497 Krytox Aerosol	26
30 08 612 Chain grease	17	30 34 428 Filter	56
30 09 461 Electronic cleaner	41	40 74 787 Compressor oil	22
30 09 800 Power steering fluid	24	46 20 084 Ultra fast adhesive	10
30 15 211 Noise absorbing panels	31	47 59 106 Compressor oil	22
30 15 229 Underseal	49	49 04 090 Adhesive	6
30 15 237 Underseal	45	49 04 108 Brake cylinder paste	18
30 15 245 Underseal	46	74 96 268 Thread locking adhesive	5
30 15 252 Stone damage protection	47	74 96 276 Thread locking adhesive	6
30 15 286 Vaseline	21	74 96 284 Thread locking adhesive	27
30 15 476 Stone damage protection	48	74 96 292 Thread locking adhesive	5
30 15 500 Multipress pistol	52	82 93 235 Adhesive	9
30 15 781 Window sealing compound	31	82 93 243 Low temperature grease	15
30 15 799 Noise absorbing panels	32	83 95 519 Measuring glass	54
30 15 807 Sealing compound	32	87 81 668 Fluid	25
30 15 815 Cleaning agent	42	87 81 676 Special grease	20

87 81 684 Universal paste	13
87 81 718 Silicone grease.....	21
87 81 841 Silicone flange sealant	27
87 92 624 Special grease	20
93 21 795 Flange sealant.....	28

Index, alphabetical order

Adhesive 30 18 645	10	Magnetic sealing strip 30 32 349	33
Adhesive 49 04 090	6	Measuring glass 83 95 519	54
Adhesive 82 93 235	9	Multipress pistol 30 15 500	52
Adhesive kit 30 02 631	11	Noise absorbing panels 30 15 211	31
Adhesive kit rear window CV 30 30 699	9	Noise absorbing panels 30 15 799	32
Adhesive kit, plastic-imbedded glass. 30 05 618 ..	8	Nozzle 30 18 652	11
Adhesive kit, window glass 30 05 600	8	Odour remover A/C 30 02 367	37
Alustick 30 31 259	55	Odour remover A/C kit 30 02 359	37
Anti-corrosion agent 30 04 520	41	Paint primer 30 18 702	50
Anti-friction agent 30 19 312	23	Paint primer 30 18 702	7
Anti-seize lubricant PTFE 30 06 954	16	Power steering fluid 30 09 800	24
Ball bearing grease 30 20 476	14	Power steering fluid 30 32 380	25
Body sealing compound 30 07 085	29	Primer, etching 30 04 736	43
Body sealing compound 30 07 093	29	Protective wax 30 15 914	49
Body sealing compound 30 32 331	28	Remover 30 02 482	38
Bodywork adhesive 30 04 769	7	Remover 30 02 490	38
Brake cylinder paste 49 04 108	18	Rubber moulding adhesive 30 08 075	12
Breathing protection mask 30 31 127	55	Screw-thread paste 30 20 971	13
Breathing protection mask 30 31 135	56	Sealing compound 30 15 807	32
Butyl tape 30 16 755	35	Sealing strip 30 07 077	33
Butyl tape 30 18 165	34	Sealing strip 30 17 795	34
Cavity fluid 30 15 930	44	Silicone flange sealant 87 81 841	27
Cavity fluid 30 15 948	44	Silicone grease 87 81 718	21
Chain grease 30 08 612	17	Silicone paste 30 07 309	15
Clean dry lubricating film 30 08 604	17	Silicone paste 30 07 895	53
Cleaning agent 30 02 599	40	Special grease 87 81 676	20
Cleaning agent 30 15 815	42	Special grease 87 92 624	20
Compressor oil 40 74 787	22	Spray gun 30 06 798	51
Compressor oil 47 59 106	22	Spray gun 30 21 011	51
Conductive paint 30 02 524	53	Sprayable joint sealant/underseal 30 17 787	30
Cooling spray 30 07 515	52	Stain remover 30 04 512	39
Copper grease 30 07 457	18	Stone damage protection 30 04 538	47
Copper grease 30 07 481	19	Stone damage protection 30 15 252	47
Electronic cleaner 30 09 461	41	Stone damage protection 30 15 476	48
Fabric-backed tape black 30 04 785	54	Stone damage protection 30 15 963	46
Filter 30 34 428	56	Tar solvent 30 08 307	39
Flange sealant 93 21 795	28	Thread locking adhesive 74 96 268	5
Fluid 87 81 668	25	Thread locking adhesive 74 96 276	6
Fresh air system 30 31 143	57	Thread locking adhesive 74 96 284	27
Gasket loosener No 4 30 07 655	40	Thread locking adhesive 74 96 292	5
Hydraulic oil 30 18 694	23	Ultra fast adhesive 46 20 084	10
Hydraulic oil 30 32 356	24	Underseal 30 15 229	49
Krytox Aerosol 30 32 497	26	Underseal 30 15 237	45
Low temperature grease 82 93 243	15	Underseal 30 15 245	46
Lubricating fluid 30 06 582	16	Underseal 30 15 971	48

62 Index, alphabetical order

Underseal 30 15 989.....	45
Universal paste 87 81 684	13
Vaseline 30 06 665	19
Vaseline 30 15 286	21
White high-pressure grease paste 30 06 442	14
White oil 30 18 637	26
Window sealing compound 30 15 781	31
Window sealing compound 30 21 268	30
Zink spray 30 15 906.....	43



SAAB

Saab Automobile AB, Trollhättan, Sweden

Saab

ENG

Ordering No. 384305. English edition. Printed in Sweden. © Saab Automobile AB 1998.